

Model-aided Geometrical Shaping of Dual-polarization 4D Formats in the Nonlinear Fiber Channel

Gabriele Liga¹, Bin Chen^{1,2}, and Alex Alvarado¹

¹Department of Electrical Engineering, Eindhoven University of Technology, Eindhoven, The Netherlands

²School of Computer Science and Information Engineering, Hefei University of Technology, Hefei, China
g.liga@tue.nl

Abstract: The geometry of dual-polarization four-dimensional constellations is optimized in the optical fiber channel using a recent nonlinear interference model. A 0.27 bit/4D rate gain and 13% reach increase are attained compared to polarization-multiplexed formats. © 2021 The Author(s)

1. Introduction

Multidimensional constellation shaping is an effective approach to harvest spectral efficiency gains in the optical fiber channel. In the additive white Gaussian noise channel (AWGN), higher gains are to be expected from geometrical shaping when increasing the number of dimensions of the constellation. However, unlike the AWGN channel where all channel degrees of freedom are alike, in the nonlinear fiber channel shaping gains depend not only on the dimensionality of the transmitted constellation but also on the specific channel degrees of freedoms used for transmission. As an example, dual-polarization four-dimensional (DP-4D) formats, i.e. 4D constellations that are mapped onto the four available degrees of freedom of the dual-polarization optical field, have been recently rediscovered for their increased nonlinearity tolerance as well as increased achievable information rates compared to polarization-multiplexed 2D (PM-2D) formats [1–3].

Constellation optimization in the nonlinear fiber channel is typically performed numerically using the split-step Fourier channel or via nonlinear interference (NLI) power models. In particular, NLI power models allow the quick computation of an effective signal-to-noise ratio (SNR) as a function of the input constellation, which is required for the computation of the objective function to optimize. However, almost all available NLI models only apply to PM-2D modulation formats is used. This limitation prevents an accurate model-based optimization of the transmitted constellation in the full DP-4D space. To circumvent this obstacle, previous works have made use of heuristic ideas, such as the constant-modulus constraint, to design good nonlinearity-tolerant constellations in 4D [2, 3], whilst maximising the linear shaping gain.

Recently in [4], we have introduced a new analytical expression for the prediction of the NLI power when a general DP-4D linear modulation is adopted. The model expresses the dependency of the NLI power on the modulation format in closed-form thus enabling a fast search of the most nonlinearly tolerant DP-4D constellations. In particular, in [5], we showed how in the DP-4D space, constant-modulus constellations are not necessarily the most robust against nonlinear distortion, and as a result, the problem of finding the optimal DP-4D constellations for optical fiber transmission is still open.

In this work, we present a first numerical optimization of the achievable information rate (AIR) for geometrically-shaped DP-4D formats supported by the use of an NLI analytical model. A set of four novel 4D constellations which outperform previously known 4D formats is presented. The results in this work confirm once again the potential of DP-4D constellations in fiber-optic transmission and leave room for further improvements.

2. Methodology

In a channel with N -dimensional input \mathbf{x} , output \mathbf{y} , and marginal distribution $p(\mathbf{y}|\mathbf{x})$, the quantity

$$I = \log_2 M + \frac{1}{M} \sum_{\mathbf{x} \in \mathcal{X}} \int_{\mathbb{R}^N} p(\mathbf{y}|\mathbf{x}) \log_2 \frac{q(\mathbf{y}|\mathbf{x})}{\sum_{\mathbf{x}' \in \mathcal{X}} q(\mathbf{y}|\mathbf{x}')} d\mathbf{y} \quad (1)$$

where $M = |\mathcal{X}|$, is an AIR for the discrete uniformly-distributed multidimensional constellation \mathcal{X} under decoding metric $q(\mathbf{y}|\mathbf{x})$ [6]. A typical assumption in optical communications is $p(\mathbf{y}|\mathbf{x}) = q(\mathbf{y}|\mathbf{x})$ and both are assumed to be a multivariate Gaussian distribution with diagonal covariance matrix and identical diagonal terms. This assumption allows an analytical computation of (1), as long as the dependence of the NLI power on the input constellation

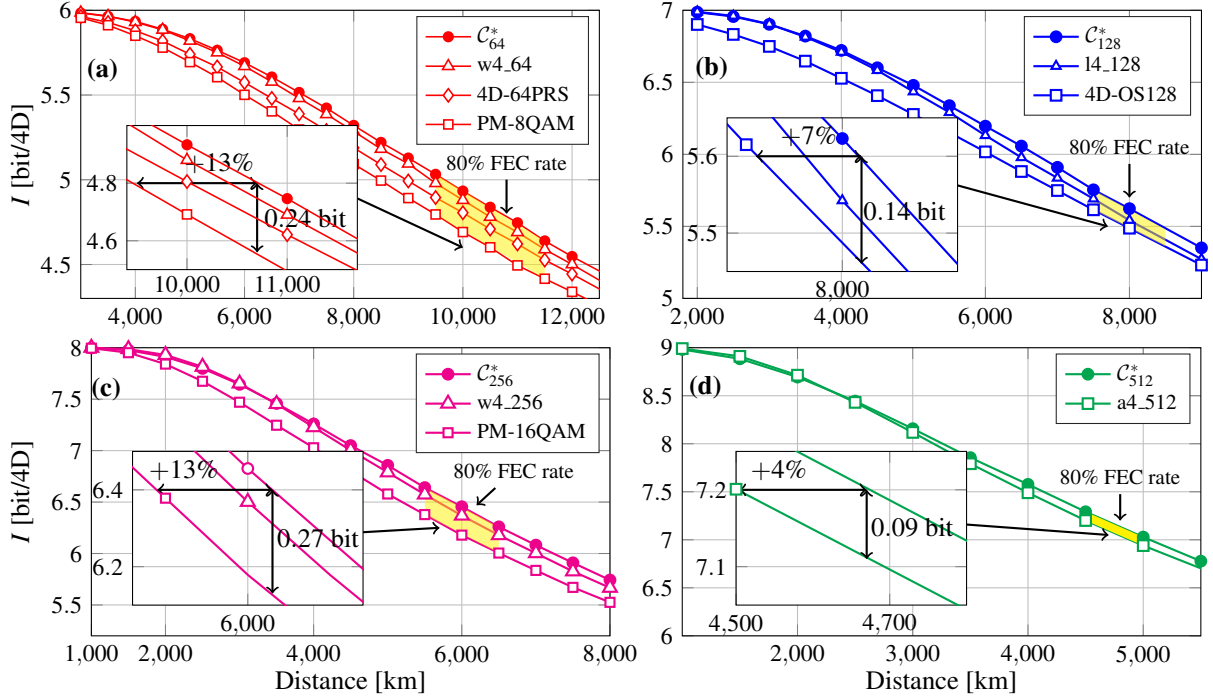


Fig. 1: Rate I in (1) vs transmission distance for the optimized DP-4D constellations C_M^* in this paper, with $m = 6$ (a), $m = 7$ (b), $m = 8$ (c), and $m = 9$ (d). Other known 4D constellations are also shown as a reference.

and power is known. For PM-2D constellations such relationship is provided, e.g., by the enhanced Gaussian noise (EGN) model [7]. Although the EGN model does not explicitly assume $p(\mathbf{y}|\mathbf{x})$ to be Gaussian its NLI power expression can still be used to compute (1) under a circularly-symmetric Gaussian assumption, as done for instance in [8]. In this work, we extend this approach by: i) replacing the expression for the EGN NLI power with the one obtained in [4, Th. 2] for DP-4D formats; ii) using a *non-circularly symmetric* 4D Gaussian distribution with diagonal covariance matrix for $q(\mathbf{y}|\mathbf{x})$. The latter step is justified by the fact that our 4D NLI model predicts in general non identical NLI powers over the two polarization channels when non PM-2D formats are transmitted.

The numerical optimization of (1) for $N = 4$, was performed using a sequential quadratic programming algorithm which is a gradient-based algorithm for optimization problems with a nonlinear constraint. In our case, this constraint is the result of imposing that the (4D) SNR is equal to the optimum SNR achievable by the trial constellation, and it fully defines the covariance matrix of $q(\mathbf{y}|\mathbf{x})$. This approach, enabled by the fast model-based computation of the DP-4D constellation NLI vector, avoids a joint optimization of the transmitted power and is justified by the monotonic behaviour of (1) as a function of the effective SNR (for a fixed constellation). To compute (1), the Gauss-Hermite quadrature with 8 points per dimension was adopted. Results were then validated against split-step Fourier method (SSFM) simulations, where the integral in (1) is computed via a Monte-Carlo (MC) approach using samples of $p(\mathbf{y}|\mathbf{x})$ from the SSFM channel. The 4D constellation geometry was optimized for a single-channel, multi-span transmission system with standard single-mode fiber and Erbium-doped fiber amplifiers (EDFAs). The parameters of this system are listed in Table 1.

TX Parameters	
Symbol rate	50 Gbaud
No. of channels	1
Root-raised-cosine roll-off	0.01%
Fiber Parameters	
Attenuation coeff. (α)	0.2 dB/km
Disp. parameter (D)	17 ps/nm/km
Nonlinear coeff. (γ)	1.2 dB/km
Link Parameters	
Span length	100 km
EDFA noise figure	5 dB

Table 1: Numerical study parameters.

3. Results

The optimization of the constellation geometry was performed for four different spectral efficiencies $m = \log_2 M$ bit/4D with $m \in \{6, 7, 8, 9\}$. The resulting constellations, hereby referred as C_M^* were compared to their corresponding PM-2D formats (for $m \in \{6, 8\}$) or with other 4D formats which are known to perform well, either in the AWGN or in the optical fiber channel. Examples of such constellations are, the Welty constellations [9] or the 4D 64 polarization-ring-switching (4D-64PRS) format [2].

As the result of the optimization was observed to be dependent on the initial constellation, the best 4D format among the ones listed in [10] was first identified, and then used as an initial value for the optimization. Namely, the initial constellation was set to the 64 point Welty constellation (w4_64), l4_128 [10], the 256-point Welty constellation (w4_256), and a4_512 [10] which is a conjectured optimal packing. To target an 80% forward error

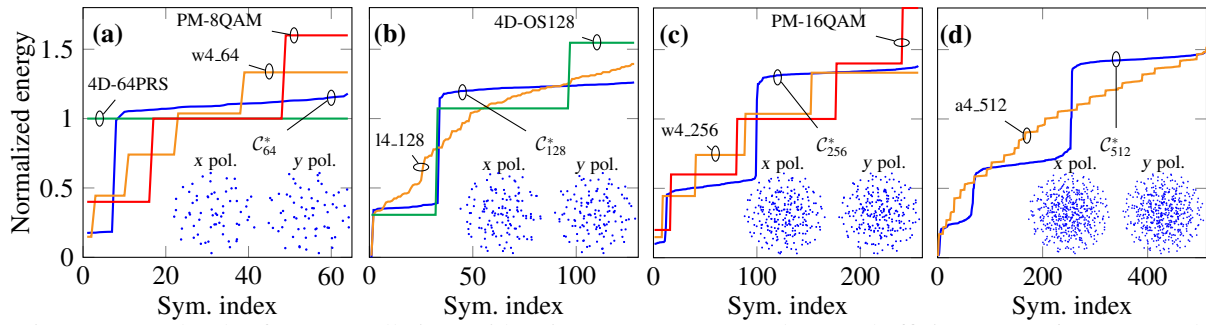


Fig. 2: Energy levels of 4D constellations with unitary mean energy and spectral efficiency $m = 6$ (a), $m = 7$ (b), $m = 8$ (c), and $m = 9$ (d).

correction (FEC) code rate, at each m the optimization was performed at a transmission distance where $I = 0.8m$ is achieved by the baseline constellations. The rate I in (1) of the C_M^* constellations was then computed as a function of the transmission distance using a SSFM-based MC approach. The results are shown in Fig. 1.

For $m = 6$, C_{64}^* achieves a 0.24 bit/4D gain and 13% longer transmission reach compared to PM 8 quadrature amplitude modulation (PM-8QAM) and about 0.12 bit/4D higher rate compared to 4D-64PRS. The performance of w4_64 is only marginally lower than C_{64}^* . For $m = 7$, C_{128}^* gains 0.14 bit/4D or 7% reach increase over the 4D orthant-symmetric constellation in [3]. This gain reduces to less than 0.1 bit/4D if compared to the 14_128 constellation [10]. For $m = 8$, 0.27 bit/4D higher rate or 13% reach increase over PM-16QAM is obtained using C_{256}^* . As in the $m = 6$ case, the WELTI constellation w4_256 only loses less than 0.1 bit/4D vs our optimized C_{256}^* . Finally, for $m = 9$, our proposed C_{512}^* achieves only a 0.09 bit/4D higher rate than a4_512 with a 4% reach increase.

As it can be observed from the insets in Fig. 2 the 2D projections over the x and y polarization planes of the C_M^* constellations are quite irregular. A better insight on the 4D geometry can be, however, gained by looking at the symbol energy distribution in Fig. 2. It can be seen that all C_M^* tend to polarize around two (for C_{64}^* and C_{128}^*) or three (for C_{256}^* and C_{512}^*) energy levels. This feature is a compromise between the constant-modulus geometry of 4D-64PRS and the large number of levels in the PM-QAM or WELTI formats. This indicates that a low number of levels (but higher than one) leads to a good trade-off between linear and nonlinear shaping gain. In our optimization, this trade-off seems to be achieved by increasing the linear shaping gain whilst maintaining a fair level of nonlinearity tolerance in the constellation. This is demonstrated by the fact that all investigated constellations (for a fixed cardinality) were found to have similar optimal SNR. Only for $m = 6$, C_{64}^* , 4D-64PRS and w4_64, achieve a more significant optimum SNR gain between 0.1 and 0.15 dB over PM-8QAM.

4. Conclusions

We conducted a numerical optimization of dual-polarization 4D formats in the nonlinear optical fiber channel enabled by our recently introduced 4D analytical model for nonlinear interference. Four novel 4D modulation formats were obtained, which outperform previously most known DP-4D formats at the same cardinality. This study also highlights the good performance in the nonlinear fiber channel of certain 4D formats such as the WELTI constellations. Due to the likely non-convexity of the optimization problem tackled in this paper, further investigation is needed to verify whether better 4D constellations than the ones proposed here exist.

Acknowledgements: The work of G. Liga is funded by the EuroTechPostdoc programme under the European Union's Horizon 2020 research and innovation programme (Marie Skłodowska-Curie grant agreement No. 754462). This work has received funding from the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme (grant agreement No. 757791).

References

1. K. Kojima, T. Yoshida, T. Koike-Akino, D. S. Millar, K. Parsons, M. Pajovic, and V. Arlunno, "Nonlinearity-tolerant four-dimensional 2A8PSK family for 5–7 bits/symbol spectral efficiency," *JLT* **35**, 1383–1391 (2017).
2. B. Chen, C. Okonkwo, H. Hafermann, and A. Alvarado, "Polarization-ring-switching for nonlinearity-tolerant geometrically shaped four-dimensional formats maximizing generalized mutual information," *JLT* **37**, 3579–3591 (2019).
3. B. Chen, A. Alvarado, S. van der Heide, M. van den Hout, H. Hafermann, and C. Okonkwo, "Analysis and experimental demonstration of orthant-symmetric four-dimensional 7 bit/4D-sym modulation for optical fiber communication," *JLT* **39**, 2737–2753 (2021).
4. G. Liga, A. Barreiro, H. Rabbani, and A. Alvarado, "Extending fibre nonlinear interference power modelling to account for general dual-polarisation 4D modulation formats," *Entropy* **22**, 1324 (2020).
5. G. Liga, B. Chen, A. Barreiro, and A. Alvarado, "Modeling of nonlinear interference power for dual-polarization 4D formats," in *OFC*, (San Francisco, CA, USA, 2021).
6. D. M. Arnold, H. A. Loeliger, P. O. Vontobel, A. Kavčić, and W. Zeng, "Simulation-based computation of information rates for channels with memory," *TIT* **52**, 3498–3508 (2006).
7. A. Carena, G. Bosco, V. Curri, Y. Jiang, P. Poggiolini, and F. Forghieri, "EGN model of non-linear fiber propagation," *Opt. Express* **22**, 16335–16362 (2014).
8. E. Sillekens, D. Semrau, G. Liga, N. A. Shevchenko, Z. Li, A. Alvarado, P. Bayvel, R. I. Killey, and D. Lavery, "A simple nonlinearity-tailored probabilistic shaping distribution for square QAM," in *OFC*, (San Diego, CA, USA, 2018).
9. G. WELTI and J. Lee, "Digital transmission with coherent four-dimensional modulation," *TIT* **20**, 497–502 (1974).
10. "Sphere packings of dimension 4," <https://codes.se/packings/4.htm>.